

| | |
|---------|-------------|
| Part # | Prepared By |
| Project | Notes |
| Type | |
| Date | |



OBW vHealth® Overbed Wall LED Light

LED Linear Architectural Luminaire 2000 - 8000 Lumens



Description

The vHealth® OBW luminaire is a wall mounted luminaire that provides a bold architectural look to provide comfortable, bright general lighting. Acrylic frosted lens hides the LED arrays and provides excellent glare control. The luminaire comes with an optional three way pull chain for uplight, downlight, or up and down light operation. Easy to install.

Warranty & Notes

ELECTRICAL SYSTEM

- System delivered lumen : 2000 - 8000 lumens
- Up Light only, Down Light only or Up / Down Light operation
- 80 CRI , 90+ CRI available
- Standard 0-10V dimming driver
- 120V-277V Input Volts
- Minimum 50,000 hour lifetime at L70
- Optional CURBELL pillow speaker interface
- Ambient Temperature Temperature:-20 ~ 40 °C(-22 °F to +104°F)
- Surge protector
- Power factor: >0.9

FRAME & MOUNTING

- Post paint steel 20ga with white finish, Other colors optional
- White painted parts are treated with a five-stage phosphate bonding process and finished with high reflectance baked enamel.
- Acrylic translucent diffuser is snapped into housing.
- White anti-microbial paint standard
- Easy to clean

Warranty & Notes

- 5-year limited warranty on LED module and driver
- ETL tested and listed to UL 1598 standards

OPTICS & OPTIONS

- Acrylic translucent diffuser
- Emergency battery backup
- Sensor



Ordering Information

EXAMPLE: OBW-48L-60W-DMV

| Series | Mounting | Size | Wattage | Driver | Kelvin (CCT) | Finish | Options* | Accessories* |
|--------|--------------------|-----------|---|---|---|--|----------------|--------------|
| OBW | Blank - Wall Mount | 24L - 24" | 20W - 2000 Lumens (up or down) 40W - 4000 Lumens (up and down) | DMV - 0-10V Dimming D1MV - 0-10V Dimming <1% G120 - TRIAC dimming | 80CRI 30K - 3000K 35K - 3500K 40K - 4000K 90+ CRI 930K - 3000K 935K - 3500K 940K - 4000K | BLANK - Antimicrobial Paint White AMxx - Antimicrobial Custom Color | EM PS PC | SS |
| | | 36L - 36" | 20W - 2000 Lumens (up or down) 40W - 4000 Lumens (up or down) 60W - 6000 Lumens (up and down) | | | | | |
| | | 48L - 48" | 40W - 4000 Lumens (up or down) 60W - 6000 Lumens (up and down) 80W - 8000 Lumens (up and down) BC35W - 4000 Lumens (up or down) BC70W - 8000 Lumens (up and down) | | | | | |

- *Notes
24L - Max 4000lms
36L - Max 6000lms
PC - Optional Pull Chain operation
PS - Compatible with CURBELL Pillow Top Control
EM20 - Emergency battery back-up 20w (remote)
SS - Sensor.
BCxxW - BioSync(R) White color tuning 2700K - 5000K


*UP and DOWN Operation

PLEASE NOTE: For up and down operation, the lumen distribution ratio from up to down is 50 / 50.

IE. 8000 lumen up and down operation will result in 4000lms up, and 4000lms down.
Compatibility with controls allows for the up to be operated independently from down.

Photometric

Luminous Intensity Distribution Curve

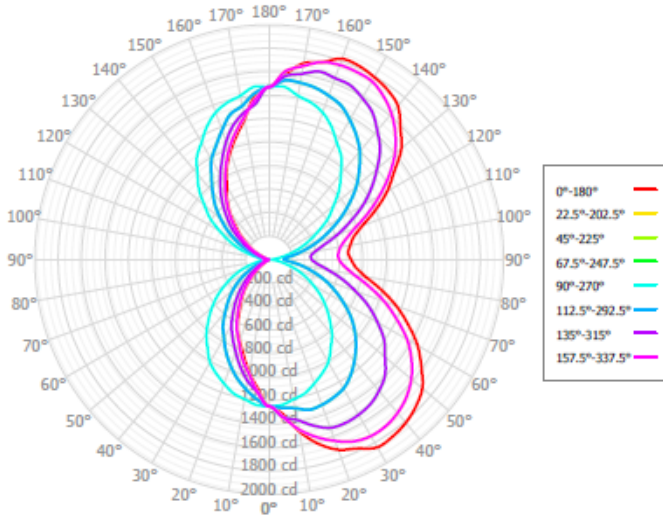


Performance Data Table

Static White

| size | lumen level | delivered lumens | watts | efficacy |
|------|-------------|------------------|-------|----------|
| 24L | 2000 | 2083 | 18.0 | 115.7 |
| | 4000 | 4102 | 33.2 | 123.6 |
| 36L | 2000 | 2086 | 17.8 | 117.2 |
| | 4000 | 4149 | 32.6 | 127.3 |
| 48L | 2000 | 2080 | 17.6 | 118.2 |
| | 4000 | 4166 | 32.2 | 129.4 |
| | 6000 | 6148 | 46.4 | 132.5 |
| 48L | 8000 | 8082 | 63.0 | 128.3 |

BioSync Tunable White

| size | lumen level | delivered lumens (3500K) | watts | efficacy |
|------|-------------|--------------------------|-------|----------|
| 24L | 2000 | 1944 | 17.0 | 114.3 |
| | 4000 | 3938 | 34.4 | 114.5 |
| 36L | 2000 | 2019 | 17.0 | 118.7 |
| | 4000 | 4012 | 34.4 | 116.6 |
| 36L | 6000 | 6028 | 51.8 | 116.4 |
| | 48L | 2000 | 2092 | 17.0 |
| 4000 | | 4087 | 34.4 | 118.8 |
| 6000 | | 6081 | 51.8 | 117.4 |
| 8000 | | 8076 | 69.6 | 116.0 |

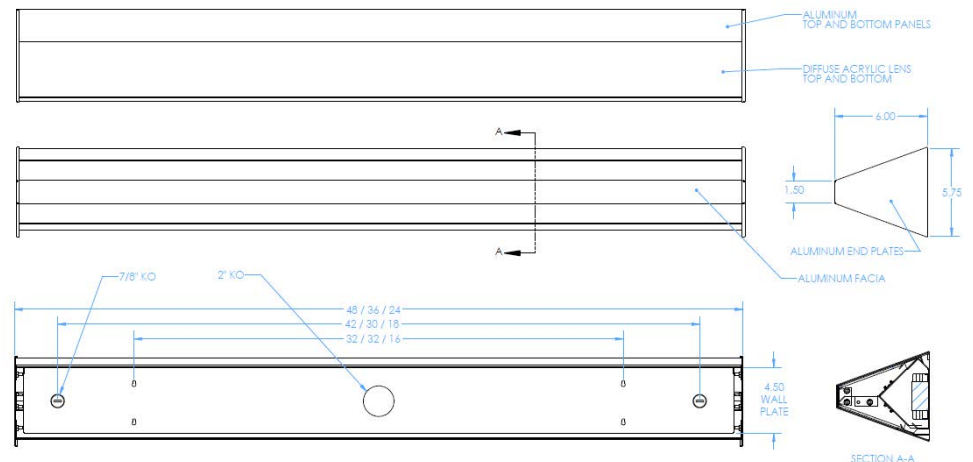

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

vHealth® is a registered trademark of Lexington Lighting Group, LLC dba Vantage Lighting